



Energy
SAVERS
LOW-H₂O



jaga



BASIC

The most powerful heat emitters for condensing boilers and heat pumps






BASIC
wall mounted cabinet



WARM POWER, TIMELESS DESIGN

Basic, yet modern. The complete pre-assembled casing can be installed in close to no time into your premises. It's Low-H₂O core will bring the temperature in every space to a comfortable level, with a minimal consumption of energy.

DIMENSIONS

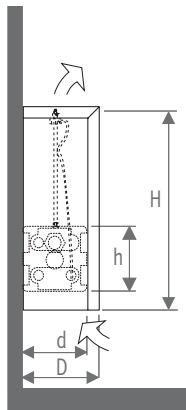

Basic is available in lengths from 19.5" (50) to 110" (280).

OUTPUT

Type	d	h	D	H 8.5	12.5	16.5	20.5	24.5	28.5	36
				(22)	(32)	(42)	(52)	(62)	(72)	(92)
10	4 (10)	4 (10)	4 11/16 (11.9)	720	839	926	992	1041	1077	1122
11	4 (10)	8 (10)	4 11/16 (11.9)	---	978	1111	1218	1306	1378	1485
15	6 (15)	4 (10)	6 21/32 (16.9)	1141	1338	1489	1607	1700	1775	1881
16	6 (15)	8 (20)	6 21/32 (16.9)	---	1490	1707	1887	2040	2171	2379
20	8 (20)	4 (10)	8 5/8 (21.9)	1600	1865	2060	2207	2319	2402	2508
21	8 (20)	8 (20)	8 5/8 (21.9)	---	2026	2321	2568	2778	2958	3246

Average output in BTU/h foot with 65°F (18.3°C) entering air and 1 GPM flow rate. Mean water temperature of 160°F (71.1°C).

CONNECTION OPTIONS

- thermostatic valve set for easy wall connection
- all Jaga connection sets are adjustable and completely lockable: fin tube elements can be removed without draining the system

Note: dimensions in "()" are shown in centimeters.

THE MOST POWERFUL HEAT EMITTERS



Significant energy savings

The most efficient and modern fin tube element, that complies with actual AND future building standards and technologies.

For all low temperature hydronic systems

Perfectly suited for condensing boilers, heat pumps and solar systems.

The perfect partner for radiant heating

for improved temperature control and energy efficiency.

Brass collectors with 1/2" connections

With dirt-repellent and dust-proof lacquer in graphite grey

Up to 16 parallel copper tubes for the best heat emission

55 Corrugated aluminum fins per foot for super heat-output at low water temperatures

