



*Energy*  
**SAVERS**  
LOW-H<sub>2</sub>O



**jaga**

**TEMPO FREESTANDING**  
The most powerful heat emitters for  
condensing boilers and heat pumps

WWW.  
**THE RADIATORFACTORY**  
.COM






## WARM POWER, BASIC STYLE

Tempo is a pioneer when it comes to energy saving. A classic, but most certainly not old-fashioned. Its horizontally lined front panel continues to be contemporary and universal. Tempo is light, fast, accurate and can be perfectly regulated. Its familiar look makes it a welcome addition to any interior.

### DIMENSIONS

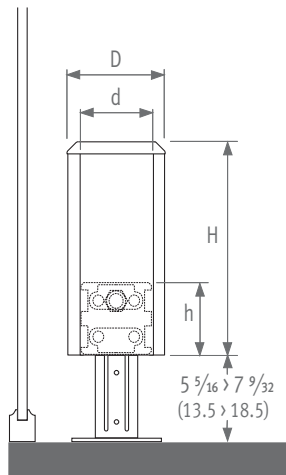

Tempo Freestanding is available in lengths from 15.5" (40) to 118" (300).

### OUTPUT

Type	d	h	D	H 8	12	15.5	19.5
				(20)	(30)	(40)	(50)
10	4 (10)	4 (10)	4 4/64 (11.8)	655	826	963	1076
11	4 (10)	8 (20)	4 4/64 (11.8)	---	1121	1264	1386
15	6 (15)	4 (10)	6 39/64 (16.8)	1090	1359	1568	1734
16	6 (15)	8 (20)	6 39/64 (16.8)	---	1480	1700	1898
20	8 (20)	4 (10)	8 37/64 (21.8)	1532	1906	2196	2425
21	8 (20)	8 (20)	8 37/64 (21.8)	---	1948	2274	2582

Average output in BTU/h foot with 65°F (18.3°C) entering air and 1 GPM flow rate. Mean water temperature of 160°F (71.1°C).

### CONNECTION OPTIONS

- thermostatic valve set for easy wall connection
- all Jaga connection sets are adjustable and completely lockable: fin tube elements can be removed without draining the system

Note: dimensions in "( )" are shown in centimeters.

## THE MOST POWERFUL HEAT EMITTERS



### Significant energy savings

The most efficient and modern fin tube element, that complies with actual AND future building standards and technologies.

### For all low temperature hydronic systems

Perfectly suited for condensing boilers, heat pumps and solar systems.

### The perfect partner for radiant heating

for improved temperature control and energy efficiency.

Brass collectors with 1/2" connections

With dirt-repellent and dust-proof lacquer in graphite grey

Up to 16 parallel copper tubes for the best heat emission

55 Corrugated aluminum fins per foot for super heat-output at low water temperatures

